

CRP-RA15A-12

INDUSTRIAL ROBOT HANDLING APPLICATION




FUNCTIONAL FEATURES

- The design of the robot is highly compact, which is more lightweight, especially the wrist is slender, so it can be applied in more scenarios.
- Adopt high speed motor, the robot has high rigidity and faster beat; Adopt leak-proof structure, the protection class of robot is up to IP 67 to adapt harsher working environment.
- The robot in the axes of J2 J3 J4 is reserved installation holes to install fixed solenoid valve and other accessories. There are IO port and dual-circuit gas pipe at J3 axis to meet the handling application.
- Driving adopts new advanced PID control technology to achieve faster response; With the functions of observer dynamic compensation and weak magnetism, the electric machine can be better controllable and more stable with higher speed.
- The new control algorithm combines Kinematics with Dynamics. The new design integrates driven algorithm and control algorithm to realize automatic programming and guarantee the service life of mechanical under the maximum working capacity based on the characteristics of mechanical components load and condition of loading. Meanwhile, the robot can realize high speed response, faster running speed and work beats with longer life span.
- With collision detection function, it can better protect the robot body and peripheral equipment; With the function of gravity compensation, the robot has higher precision, so it can be applied in more scenarios.
- Equipped with safety emergency stop board which is independent of the control system, and the safety relay circuit is adopted to provide double-circuit emergency stop to ensure the reliability of emergency stop.
- Built-in three-phase filter can effectively improve the performance of internal and external distractions.

ROBOT BODY TECHNICAL PARAMETERS

Model		CRP-RA15A-12
Arm form		Vertical multiple joints
Degree of freedom		6 axis
Maximum payload		12kg
Maximum coverage		1554mm
Maximum travel	Axis 1	Formal/inverted-167°~167°, wall mounting-30°~30°
	Axis 2	-155°~90°
	Axis 3	-85°~155°
	Axis 4	-190°~190°
	Axis 5	-135°~135°
	Axis 6	-360°~360°
Maximum speed	Axis 1	169°/S
	Axis 2	169°/S
	Axis 3	169°/S
	Axis 4	301°/S
	Axis 5	220°/S
	Axis 6	743°/S
Allowable torque	Axis 4	20N.m
	Axis 5	20N.m
	Axis 6	11N.m
Allowable moment of inertia	Axis 4	0.5kg.m ²
	Axis 5	0.5kg.m ²
	Axis 6	0.16kg.m ²
Repeated positioning accuracy		±0.05mm
Robot body weight		170kg
Installation mode		Formal <input type="checkbox"/> inverted <input type="checkbox"/> wall mounting <input type="checkbox"/>
Body interface	Reserved IO	16Pin
	Reserved gas	2*φ8mm
Installation environment	Ambient temperature	0~45°C
	Relative humidity	20%~80%RH(No condensation)
	Vibration	Under 0.5G
	Others	Robot installation must be away from: flammable or corrosive liquids or gases, electrical sources of interference
IP level		Body IP54 Wrist IP67
Advantage features		Compact structure, high speed, high precision, high expansibility and easy operation
Application		Handling, cutting, mounting, marking, welding, polishing
Matching electrical cabinet		G9A

INSTALLATION INTERFACE DIAGRAM

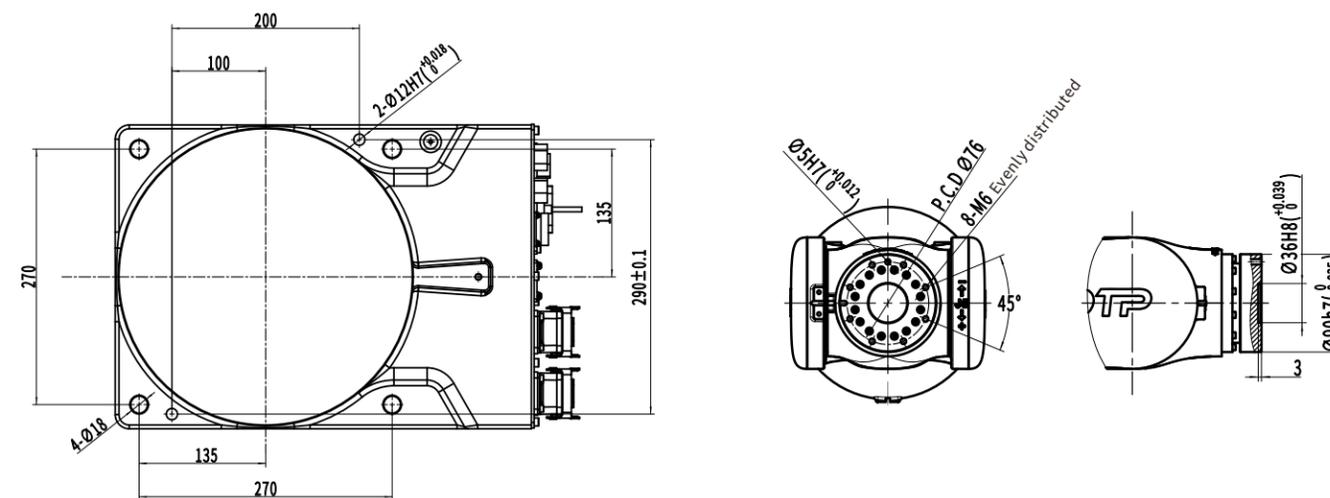

Installation Dimension of Base

Flange Dimensions

WORKING RANGE DIAGRAM

